

FIRMWARE UPGRADE GUIDE

V1.1

Copyright and Disclaimer:

- ⦿ All copyrights belong to Shenzhen fifotrack Solution Co., Ltd. You are not allowed to revise, copy or spread this file in any form without consent of fifotrack.
- ⦿  is trademark of fifotrack, protected by law.
- ⦿ Please read this user guide carefully before installation to avoid any possible personal injury or property loss.

Revision History

Version	Author	Revision Date	Description of change
V1.1	Vito Hu	Sep 17, 2015	Initial revision

Related Files

Version	File	Remarks
V1.1	<FIFOTRACK GPRS PROTOCOL>	GPRS protocol between terminal and server.
V1.1	<FIFOTRACK COMMAND LIST>	Command details of GPRS/SMS/COM
V1.1	<FIFOTRACK VEHICLE GPS TRACKER A100 USER GUIDE>	A100 vehicle tracker model user guide
V1.1	<FIFOTRACK PARAMETER TOOL USER GUIDE >	PC software tool for parameter configuration
V1.1	<USB CABLE DRIVER INSTALLATION GUIDE>	How to install USB cable driver



Contents

<i>1 Overview</i>	<i>4</i>
<i>2 Firmware Upgrade Steps.....</i>	<i>4</i>


1 Overview

Firmware upgrade suite is a tool to upgrade firmware efficiently. You are not encouraged to upgrade firmware if terminal under good performance condition. Please contact to your sales account manager to receive the latest firmware versions if really needed.

2 Firmware Upgrade Steps

2.1 Ensure the USB cable driver is installed before using firmware upgrade suite software. Refer to <USB CABLE INSTALLATION GUIDE> file for more details.


2.2 Visit www.fifotrack.com click "Support" menu to download firmware upgrade suite software.




2.3 Ensure the terminal is powered on, connect terminal with PC via USB cable, run firmware upgrade suite directly.

2.4 Choose correct port and baud rate, A100's baud rate is **9600**


Right Click "My PC"/"Manage"/"Device Manager"/"Port" to identify correct port"COM5"

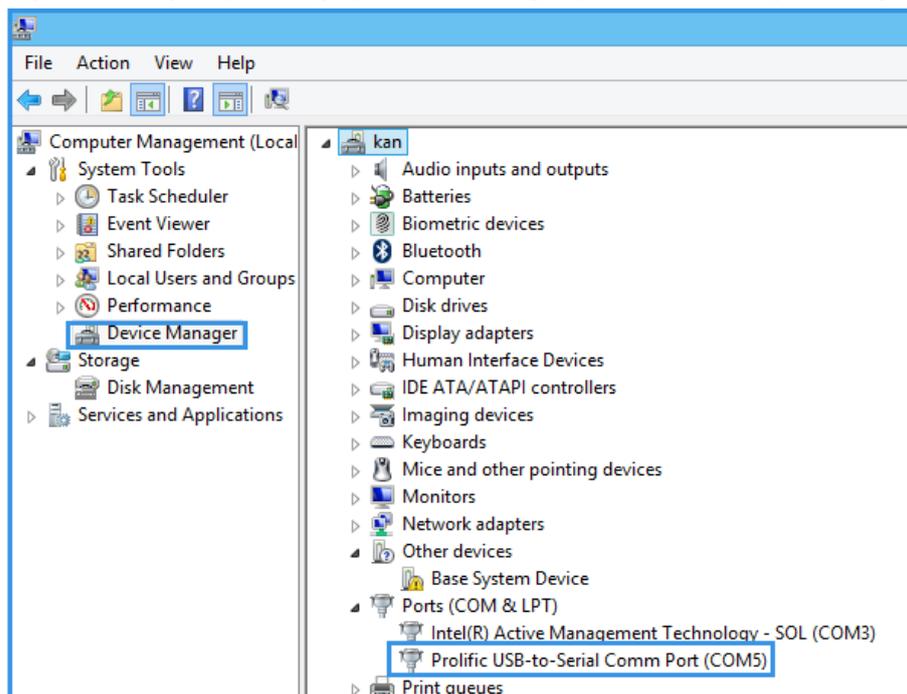


2.5 Click "Connect" to open port

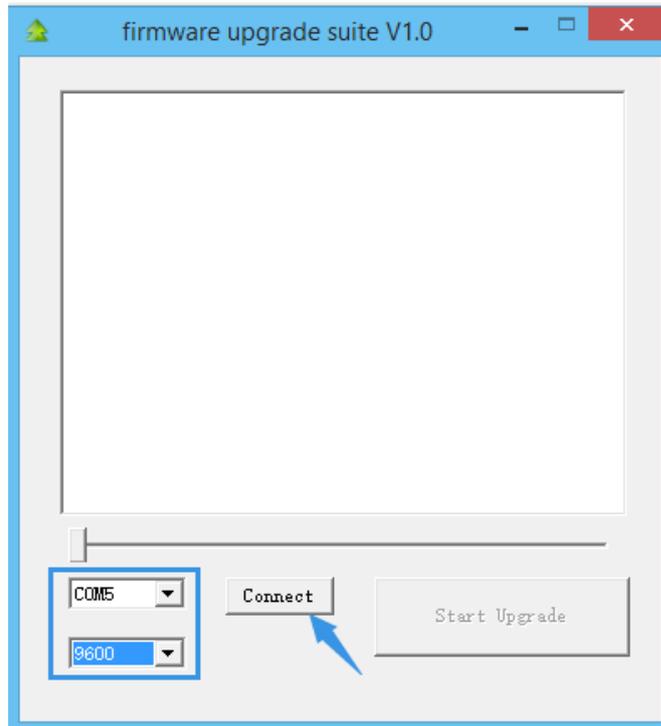


2.6 Click "Start Upgrade" to choose firmware version

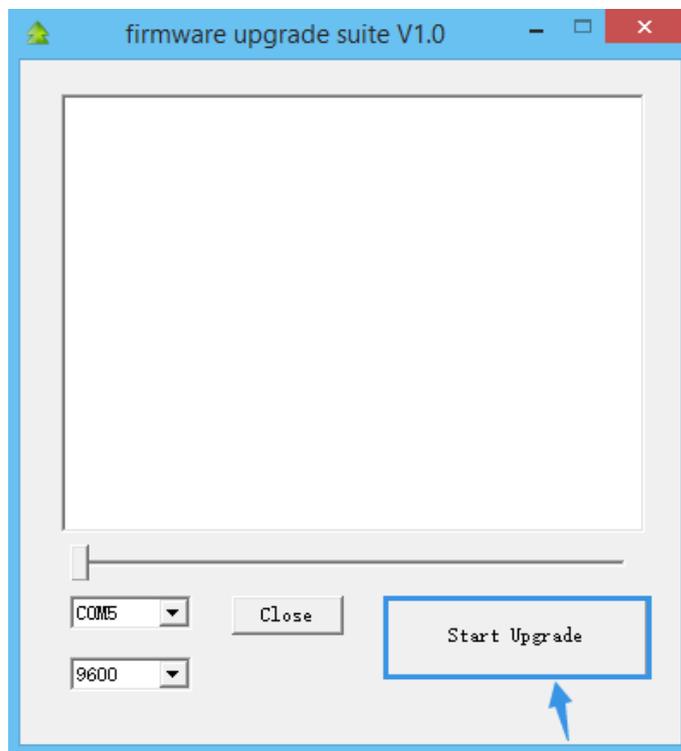


2.7 Choose firmware version

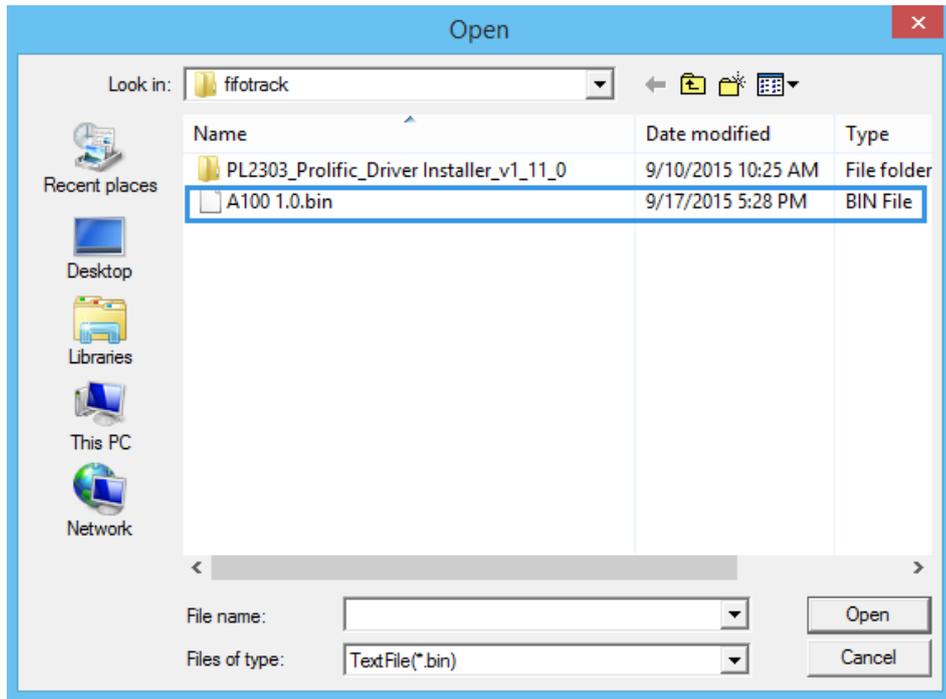

2.8 The progress bar will display firmware upgrade status

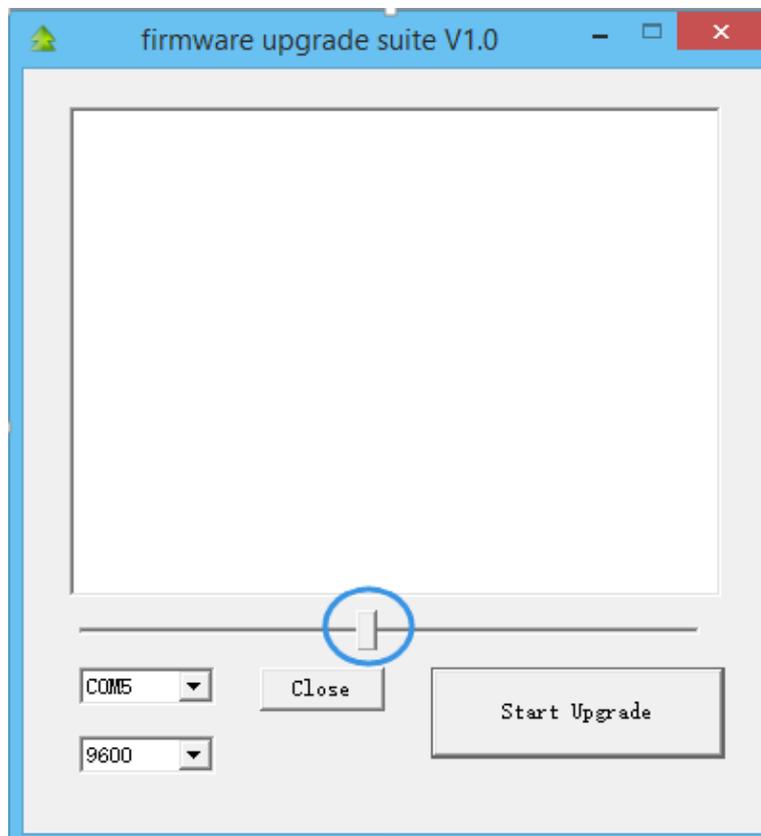

2.9 When firmware upgrade successfully, interface will pop up an “Upgrade Succeed” box

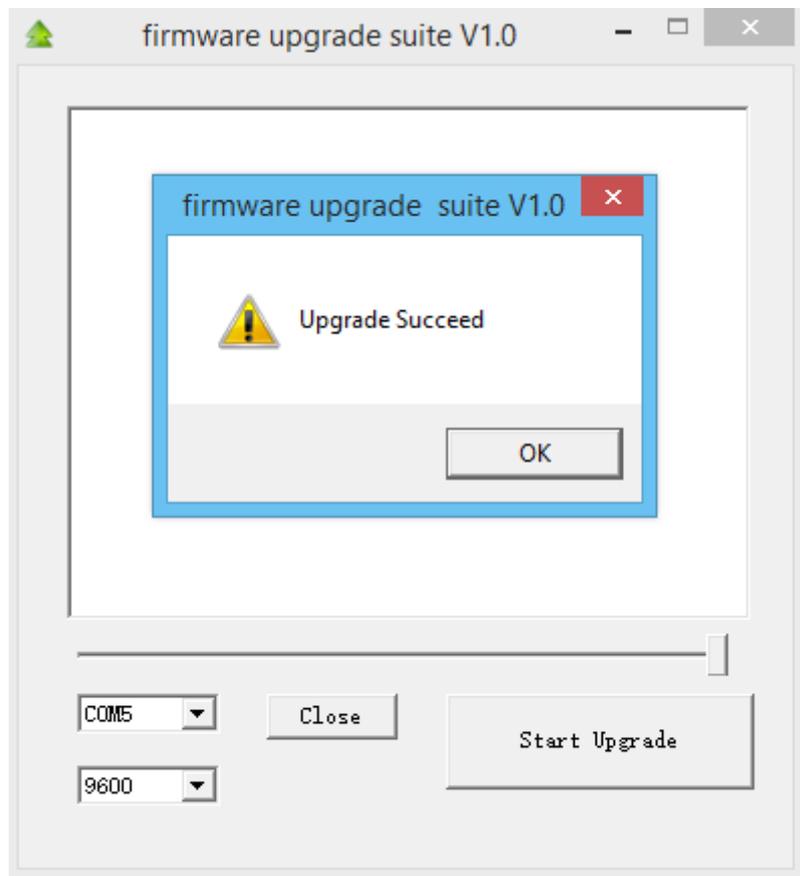

Please e-mail us at info@fifotrack.com if any question or feedback.